


GRAND INGROUND 12V

5033

WAC

LANDSCAPE LIGHTING

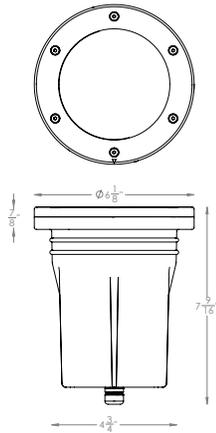

Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

Landscape high output In-ground luminaire with dynamic beam changing and integral on-board dimming.

FEATURES

- Tilttable and adjustable beam angle
- Integral dimmer
- IP67 rated, protected from temporary immersion under water
- Drive over up to 4500lbs
- Solid diecast brass or corrosion resistant aluminum
- Available concrete pour kit
- 6' lead wire and direct burial gel filled wire nuts included
- Maintains constant lumen output against voltage drop
- UL 1838 Listed
- MLV dimmable with remote MLV dimmers

SPECIFICATIONS

- Input:** 9 - 15VAC (Transformer is required)
Power: 2W to 25W / 3VA - 33VA
Brightness: 105 lm to 2000 lm
Beam Angle: 20° to 60°
CRI: 85
Rated Life: 50,000 hours

IEC safety Standard	Walk over	Drive over
Resistance to static load test	Yes (1125lbs)	Yes (4496lbs)
Resistance to torque and shear loads test	N/A	Yes

ORDERING NUMBER

	Color Temp	Finish
5033 Grand Inground 12V	27 2700K	BZ Bronze on Aluminum
	30 3000K	BBR Bronze on Brass

5033-_____

Example: **5033-30BBR**

wacighting.com Headquarters, East Manufacturing Facility South East Manufacturing Facility Central Manufacturing Facility West Manufacturing Facility
 Phone (800) 526.2588 44 Harbor Park Drive 1600 Distribution Ct 1700 South J Elmer Freeway, Ste 100 1750 S Archibald Ave
 Fax (800) 526.2585 Port Washington, NY 11050 Lithia Springs, GA 30122 Cedar Hill, TX 75104 Ontario, CA 91761

Rock Guard

Protects the fixture face



5830-GRD-BZ

Bronze on Aluminum

5830-GRD-BBR

Bronze on Brass

Concrete Pour Kit

*For installation in concrete
Five 1/2" NPT threaded holes, PC*



5830-PIP-PVC

Shown with temporary dense foam cap

Magnetic Transformers

*Stainless Steel, 12-15V output, IP65 rated, UL 1838 listed
See transformer spec sheet for details and its accessories*

9075-TRN-SS

75W Max

9150-TRN-SS

150W Max

9300-TRN-SS

300W Max

9600-TRN-SS

600W Max

