
# CHAMBER 12V/120V/277V LED BOLLARD

WAC

6631/6632/6633

## LANDSCAPE LIGHTING



Fixture Type:	
Catalog Number:	
Project:	
Location:	

#### **PRODUCT DESCRIPTION**

Sleek linear design blends seamlessly into pathways while providing soft, even illumination

#### **FEATURES**

- IP66 rated, Protected against powerful water jets
- · Factory sealed water tight fixtures
- Mounting accessories included
- UL & cUL 1838 Listed (12V); 1598 Listed (120V/277V)

Model		Colo	Color Temp		Finishes	
6631	12V	27 30	2700K Warm White 3000K Pure White	BZ BK	Bronze on Aluminum Black on Aluminum	
6632	120V	27 30	2700K Warm White 3000K Pure White	BZ BK	Bronze on Aluminum Black on Aluminum	
6633	277V	27 30	2700K Warm White 3000K Pure White	BZ BK	Bronze on Aluminum Black on Aluminum	

6632-\_\_\_BK

Example: **6632-30BK** 

#### **SPECIFICATIONS**

6631

**Input:** 9-15VAC (Transformer is required)

**Power:** 5.5W / 6.0VA **Brightness:** Up to 140 Im

**CRI:** 90

Rated Life: 60,000 hours
Dimming: MLV dimming only

6632

 Input:
 120V

 Power:
 12.5W

 Brightness:
 Up to 360 lm

 CRI:
 90

 Rated Life:
 60,000 hours

**Dimming:** TRIAC or ELV dimming

6633

 Input:
 277V

 Power:
 10.5W

 Brightness:
 Up to 400 lm

 CRI:
 90

 Rated Life:
 60,000 hours

 Dimming:
 ELV dimming only



waclighting.com Phone (800) 526.2588 Fax (800) 526.2585 **Headquarters/Eastern Distribution Center** 44 Harbor Park Drive Port Washington, NY 11050 Central Distribution Center 1600 Distribution Ct Lithia Springs, GA 30122 Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760


## CHAMBER 12V/120V/277V LED BOLLARD

### 6631/6632/6633

• Recommended spacing for installation :


6631 (12V)

Residential: 19.5 to 23ft Commercial: 13 to 15.5ft

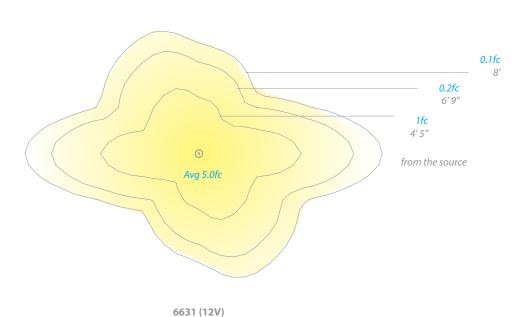

- Recommended spacing for installation :

6632, 6633 (120V, 277V) Residential: 12.5 to 15ft Commercial: 8 to 10ft

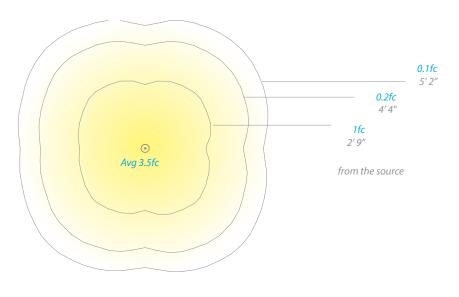

6632, 6633 (120V, 277V)