ARCHETYPE 12V/120V/277V LED BOLLARD



6641/6642/6643

LANDSCAPE LIGHTING



PRODUCT DESCRIPTION

Sleek linear design blends seamlessly into pathways while providing soft, even illumination

FEATURES

- IP66 rated, Protected against powerful water jets
- · Factory sealed water tight fixtures
- Mounting accessories included
- UL & cUL 1838 Listed (12V); 1598 Listed (120V/277V)

Model		Color Temp		Finishes	
6641	12V	27 30	2700K Warm White 3000K Pure White	BZ BK	Bronze on Aluminum Black on Aluminum
6642	120V	27 30	2700K Warm White 3000K Pure White	BZ BK	Bronze on Aluminum Black on Aluminum
6643	277V	27 30	2700K Warm White 3000K Pure White	BZ BK	Bronze on Aluminum Black on Aluminum

6643- BZ

Example: **6643-30BZ**

SPECIFICATIONS

6641

Input: 9-15VAC (Transformer is required)

Power: 5.5W / 6.0VA **Brightness:** Up to 150 lm

CRI: 90

Rated Life: 60,000 hours

Dimming: MLV dimming only

6642

 Input:
 120V

 Power:
 12.5W

 Brightness:
 Up to 390 lm

 CRI:
 90

Rated Life: 60,000 hours

Dimming: TRIAC or ELV dimming

6643

 Input:
 277V

 Power:
 10.5W

 Brightness:
 Up to 430 lm

 CRI:
 90

Rated Life: 60,000 hours
Dimming: ELV dimming only



waclighting.com Phone (800) 526.2588 Fax (800) 526.2585 Headquarters/Eastern Distribution Center 44 Harbor Park Drive Port Washington, NY 11050 Central Distribution Center 1600 Distribution Ct Lithia Springs, GA 30122 Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760

ARCHETYPE 12V/120V/277V LED BOLLARD




6641/6642/6643

LANDSCAPE LIGHTING

- Recommended spacing for installation :


6641 (12V)

Residential: 11.5 to 14ft Commercial: 7 to 9ft

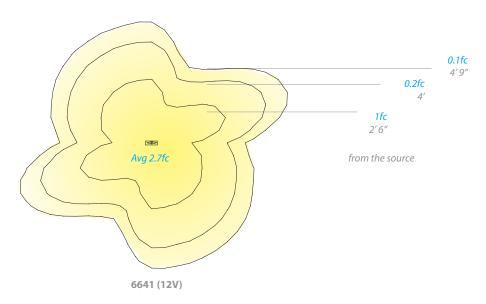

• Recommended spacing for installation :

6642, 6643 (120V, 277V) Residential: 12.5 to 14.5ft Commercial: 8 to 9.5ft

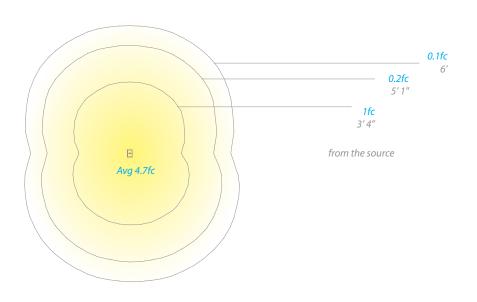

6642, 6643 (120V, 277V)